

Full HD for the most flexible,  
realistic video communications  
experience ever



## Experience Exceptional Communication

It's here -- the next generation in Full HD video communications. Introducing LifeSize® Room 220™, the world's most powerful HD video communications system.

With LifeSize Room 220, you get the highest level of quality available today -- Full High Definition, standards-based 1080p30 for the highest resolution on the market and 720p60 for the best motion handling with lower latency. But, LifeSize Room 220 comes standard with an embedded 8-way Continuous Presence multipoint bridge showing 4 visible sites, complete with transcoding and all digital I/O. Plus, LifeSize Room 220 also has a point-to-point throughput of 8Mbps. And the compact, sleek unit is less than half the size of comparable solutions.

One look and you can see for yourself that the LifeSize® difference is the LifeSize experience -- superior video communications across cities, countries and continents.

Flexibility is enhanced, since our exemplary attention to the human interface ensures that the LifeSize Room 220 system is simple and easy to use. And because we're committed to open architecture, proven LifeSize interoperability provides full integration into your existing standards-based communications infrastructure.

LifeSize Room 220 features:

- Unprecedented bandwidth/performance
- Adaptive Motion Control with Forward Error Correction
- Streaming and Recording of point to point or multipoint calls

### In today's world, better than being there.

In addition to technology, service and support, LifeSize offers the most exceptional quality and user simplicity, making remote communications a more productive, true-to-life experience. And like all LifeSize products, LifeSize Room 220 delivers superior quality of experience, unique flexibility and unmatched price performance.

## LifeSize Room 220 Key Features

Video  
Quality

Full High Definition  
Standards-based  
1920x1080 - 30fps  
1280x720 - 60fps

HD Monitors



HD Cameras  
Pan-Tilt-Zoom  
(PTZ)



HD Audio



External  
Audio, Video & Data  
Input/Output

Audio: 8 in, 4 out  
Video: 6 in, 2 out  
Data: 2 in, 2 out

Point-to-Point  
HD Video  
Communications



Embedded  
Continuous  
Presence (CP)  
HD Multipoint



Embedded  
Voice Activated  
Switching (VAS)  
HD Multipoint



# Product Specifications - LifeSize® Room 220™

## System Components

LifeSize codec with stand  
High Definition PTZ LifeSize Camera 200 or LifeSize Camera 10x  
LifeSize Phone  
Wireless remote control  
Power Supply  
Cables

## Communications

H.323, SIP  
128Kbps - 8.0Mbps (point-point)  
128Kbps - 2.0Mbps (multipoint, per call)  
1xRJ-45 Network LAN (10/100 Mbps)  
1xRJ-45 for LifeSize Phone (PoE supported)  
1xRJ-45 for LifeSize Networker (PoE supported)  
1xRJ-11 for analog telephone line  
1x3.5mm Mic In for LifeSize MicPod

## Support for multiple HD displays

Any high definition display supporting HDMI or DVI-I input  
For additional information on displays, visit: [www.lifesize.com/support](http://www.lifesize.com/support)

## High Definition 1080p30/720p60 PTZ Camera

Support for two active camera sources at 720p30  
Wide-angle zoom lens with 70 degree field of view  
Up to 4x/10x optical zoom on LifeSize Camera 200/10x  
Auto focus / Automatic gain control  
10 camera presets (near and far end)  
Standard 3.0 M HDMI cable  
Support for Sony EVI-HD1 camera (optional)

## Video Specifications/Video Resolutions

Maximum resolutions widescreen 16:9 aspect ratio  
All resolutions progressive scanning  
All resolutions at 30 frames per second except 60 frames per second where noted  
384Kbps (912x512pixels) DVD resolution  
512Kbps (1024x576pixels)  
768Kbps(1280x720pixels) High Definition  
1.1Mbps (1280x720pixels @ p60) High Definition  
1.7Mbps or higher (1920x1080pixels) High Definition

## Video Standards

H.261, H.263, H.263+, H.264 and H.239 compliant  
Support for multiple dual live streaming modes:  
1080p30 and 720p5  
720p60 and 720p5  
720p30 and 720p30

## Video Formats

High Definition, 16:9 aspect ratio

## Video Inputs (6 Inputs)

1 x High Definition Camera (720p30)  
2 x HD Video In (1080p30/720p30)  
1 x DVI-I In (HDMI/VGA enabled)  
1 x Component In or 1 x Composite In  
1 x S-Video In

## Video Outputs (2 Outputs)

1 x HD Video Out (1080p30/720p60)  
1 x DVI-I Out (1080p30/720p60)

## Fully Integrated, HD Audio Conference Phone

100Hz up to 16kHz  
Powered by codec directly through cable

## Audio Features

High Definition audio  
GIPS NetEQ packet loss concealment  
Full duplex for natural conversations  
Echo cancellation for echo-free calls  
Automatic gain control  
Automatic noise reduction  
MicPod or Dual MicPod support (optional)

## Audio Standards

G.711, G.722, G.722.1C licensed from Polycom®, G.728, G.729, MPEG-4-AAC-LC

## Audio Inputs (8 Inputs)

1 x RJ-45 (LifeSize Phone)  
2 x Stereo Line In (3.5mm)  
1 x Mic In - Two channel (3.5mm)  
2 x HD Video In  
1 x DVI-I In  
1 x HD Camera In (Focus)

## Audio Outputs (4 Outputs)

1 x RJ-45 (LifeSize Phone)  
1 x Stereo Line Output (3.5mm)  
1 x HD Video Out  
1 X DVI-I Out

## Other Supported Standards

H.221, H.224, H.225, H.231, H.241, H.242, H.245, H.281, BONDING (ISO13871) via LifeSize Networker, RFC 3261, RFC 3264, RFC 2190, RFC 3407, RFC 2833

## User Interface & Features

Context sensitive user interface  
Graphical User Interface Call Manager  
Multiple languages supported  
Do Not Disturb mode

## Stream/Recording

Record/Stream outside a call  
Recrod/Stream point-to-point or multipoint calls  
Capture all call participants  
Single button, ad-hoc recording  
Recording indicator

## Security

Admin and User level password  
SNMP security alerts  
Ability to disable HTTP, SSH and Telnet services  
H.235 (AES) encryption support including strict compliance  
TLS/SRTP support  
IEEE 802.1x support  
Kensington Security Slot

## Intelligent Network Features

Adaptive Motion Control (AMC) including Forward Error Correction (FEC)  
NAT/Firewall Traversal (H.460/SIP)  
IPv4 and IPv6 support  
Auto bandwidth detection  
ISDN support via LifeSize Networker

## Directory and Address Book

Up to 1000 local directory entries  
Save, Lock, Remove Redial List features  
Missed call notification  
Auto-Discovery directory lookup (patent pending)  
LDAP support / H.350 compliant  
Meetings Directory support

## Embedded HD Multipoint Control Unit

Full HD CP MCU with up to 4 visible participants  
Up to 8-way 720p60/ 720p30/ 6-way 1080p30 CP or VAS mode  
Transcoding support  
Virtual Multiway allows participant viewing control (patent pending)  
H.239 multipoint support shared from any participant  
Disable multipoint option

## System Management

Out of box setup via web interface and management tool SNMP  
1 x DB-9 RS-232 port configurable as control  
Backup and Restore capability  
JPEG snapshots through web interface

## Power

AC Voltage 100-240V, 50-60 Hz, 2.5A via external power supply

## Environmental Data

Operating temperature: 0 C (32 F) to 40 C (104 F)  
Operating Humidity: 15% to 85%, non-condensing  
Storage temperature: -20 C (-4 F) to 60 C (140 F)  
Storage humidity: 10% to 90%, non-condensing


## Codec Dimensions

Width: 373.9mm (14.72")  
Depth: 225mm (8.86")  
Height: 48.3mm (1.9")  
Weight: 2.24 Kg ( 4.94lbs)

Regulatory Model Number  
LifeSize Room 220 = LFZ-015

For additional information: [www.lifesize.com/support](http://www.lifesize.com/support)

Information contained in this document is subject to change without notice. LifeSize® is the registered trademark or trademark of LifeSize Communications Inc. All other trademarks are the property of their respective owners. For patents covering LifeSize® products refer to <http://www.lifesize.com/support/legal>. © Copyright 2009. All rights reserved. October 2009.

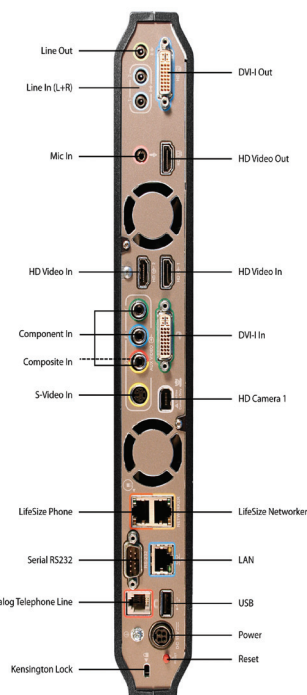

LifeSize Communications:  
1601 S. MoPac Expressway  
Suite 100  
Austin, Texas 78746 USA

Phone: +1 512 347 9300  
Fax: +1 512 347 9301  
Email: [info@lifesize.com](mailto:info@lifesize.com)  
[www.lifesize.com](http://www.lifesize.com)

EMEA:  
LifeSize Communications  
Toll-Free Europe  
008000 999 09 799

APAC:  
LifeSize Communications  
Hong Kong  
Phone: +852 3189 7061